

2 Flute IMPACT MIRACLE Long Neck End Mill

Series
Expansion

VF-2XL

2 flute long neck square type, a new addition to the IMPACT MIRACLE end mill series.

- Varied neck lengths available to suit machining of deep and complex parts.



IMPACT MIRACLE end mill series



2 Flute IMPACT MIRACLE Long Neck End Mill

VF-2XL

Features



- Newly developed end cutting edge geometry improves the corner fracture resistance. (Double gash geometry)
- IMPACT MIRACLE coating with high heat resistance is used enabling the machining of hardened steels (over 60HRC) through to general steels.
- Varied neck lengths available to suit machining of deep and complex parts.

Double gash geometry

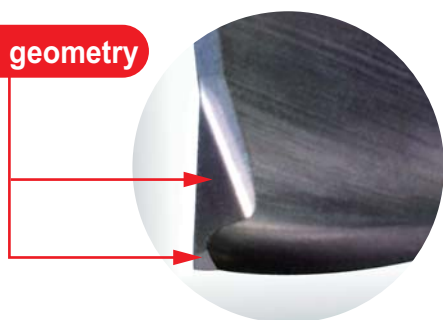


Fracture resistance comparison when machining hardened steels

Excellent fracture resistance when machining hardened steels!

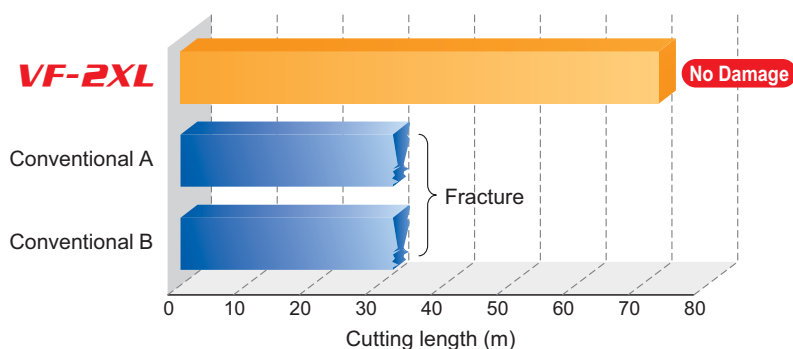

SKD61(52HRC) Cutting edges after machining 32m

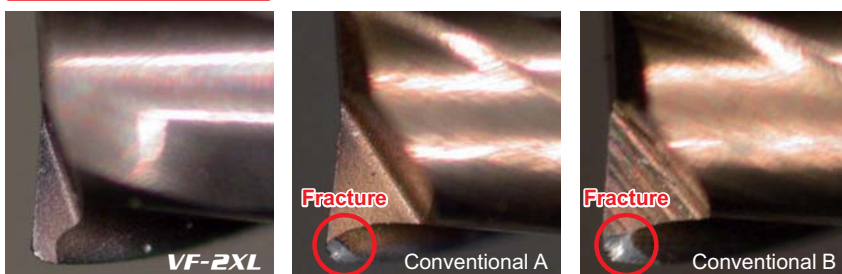

End mill	VF-2XL $\phi 1 \times 8$
Workpiece	JIS SKD61 (52HRC)
Revolution	30000min ⁻¹ (94m/min)
Feed rate	600mm/min (0.01mm/tooth)
Machining method	Down Cut, Mist blow

VF-2XL

End mill, Long cut length, 2 flute




0 - -0.020



4 ≤ D4 ≤ 6 0 - -0.008

Carbon Steel, Alloy Steel, Cast Iron (<30HRC)	Tool Steel, Pre-Hardened Steel, Hardened Steel (≤45HRC)	Hardened Steel (≤55HRC)	Hardened Steel (>55HRC)	Austenitic Stainless Steel	Titanium Alloy Heat Resistant Alloy	Copper Alloy	Aluminum Alloy
○	◎	◎	◎				

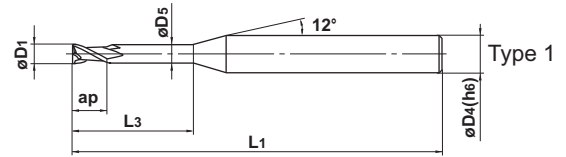

Helix angle



Gash land



D1 < 3



D1 = 3

● 2 flute long neck end mill for high-speed machining of hardened steels.

Unit : mm


Order Number	Dia.	Length of Cut	Neck Length	Neck Dia	Overall Length	Shank Dia.	No. of Flute	Stock	Type
	D1	ap	L3	D5	L1	D4	N		
NEW VF2XLD0010N005	0.1	0.15	0.5	0.085	45	4	2	●	1
D0020N006	0.2	0.3	0.6	0.17	45	4	2	●	1
D0020N010	0.2	0.3	1	0.17	45	4	2	●	1
D0020N015	0.2	0.3	1.5	0.17	45	4	2	●	1
D0030N010	0.3	0.5	1	0.27	45	4	2	●	1
D0030N020	0.3	0.5	2	0.27	45	4	2	●	1
D0030N030	0.3	0.5	3	0.27	45	4	2	●	1
D0040N010	0.4	0.6	1	0.36	45	4	2	●	1
D0040N020	0.4	0.6	2	0.36	45	4	2	●	1
D0040N040	0.4	0.6	4	0.36	45	4	2	●	1
D0050N020	0.5	0.8	2	0.46	45	4	2	●	1
D0050N040	0.5	0.8	4	0.46	45	4	2	●	1
D0050N060	0.5	0.8	6	0.46	45	4	2	●	1
D0060N020	0.6	0.9	2	0.56	45	4	2	●	1
D0060N040	0.6	0.9	4	0.56	45	4	2	●	1
D0060N060	0.6	0.9	6	0.56	45	4	2	●	1
D0080N040	0.8	1.2	4	0.76	45	4	2	●	1
D0080N060	0.8	1.2	6	0.76	45	4	2	●	1
D0080N080	0.8	1.2	8	0.76	50	4	2	●	1
D0080N100	0.8	1.2	10	0.76	50	4	2	●	1
D0100N040	1	1.5	4	0.94	50	4	2	●	1
D0100N060	1	1.5	6	0.94	50	4	2	●	1
D0100N080	1	1.5	8	0.94	50	4	2	●	1
D0100N100	1	1.5	10	0.94	50	4	2	●	1
D0100N120	1	1.5	12	0.94	50	4	2	●	1
D0150N060	1.5	2.3	6	1.44	50	4	2	●	1
D0150N080	1.5	2.3	8	1.44	50	4	2	●	1
D0150N100	1.5	2.3	10	1.44	50	4	2	●	1
D0150N120	1.5	2.3	12	1.44	50	4	2	●	1
D0150N160	1.5	2.3	16	1.44	60	4	2	●	1
D0200N060	2	3	6	1.9	50	4	2	●	1
D0200N080	2	3	8	1.9	50	4	2	●	1
D0200N100	2	3	10	1.9	50	4	2	●	1
D0200N120	2	3	12	1.9	50	4	2	●	1
D0200N160	2	3	16	1.9	60	4	2	●	1
D0200N200	2	3	20	1.9	60	4	2	●	1
D0300N120	3	4.5	12	2.9	50	6	2	●	1
D0300N160	3	4.5	16	2.9	60	6	2	●	1
D0300N200	3	4.5	20	2.9	60	6	2	●	1

● : Inventory maintained.

IMPACT MIRACLE END MILL

Work material		Hardened steel (40–55HRC) NAK, JIS SKD61, STAVAX			Hardened steel (55–65HRC) JIS SKD11, HSS		
Dia. (mm)	Neck length (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)	Revolution (min ⁻¹)	Feed rate (mm/min)	Depth of cut ap (mm)
0.1	0.5	40000	100	0.002	40000	80	0.001
	0.6	40000	400	0.004	40000	360	0.004
0.2	1	40000	300	0.003	40000	250	0.002
	1.5	40000	200	0.002	40000	150	0.001
0.3	1	40000	500	0.006	40000	450	0.004
	2	40000	400	0.003	38000	350	0.002
	3	38000	250	0.002	36000	200	0.001
0.4	1	40000	800	0.008	36000	500	0.006
	2	40000	500	0.007	30000	350	0.005
	4	36000	300	0.004	27000	200	0.003
0.5	2	40000	800	0.01	30000	600	0.009
	4	36000	600	0.008	27000	450	0.007
	6	30000	400	0.005	22000	300	0.004
0.6	2	40000	1000	0.015	30000	700	0.012
	4	36000	800	0.01	27000	500	0.01
	6	30000	600	0.006	22000	350	0.006
0.8	4	36000	1200	0.03	27000	900	0.02
	6	30000	900	0.02	22000	650	0.015
	8	24000	600	0.01	18000	450	0.008
	10	20000	400	0.008	15000	300	0.005
1	4	32000	1600	0.05	24000	1100	0.04
	6	32000	1400	0.04	24000	1000	0.03
	8	28000	1000	0.03	21000	750	0.02
	10	28000	800	0.02	21000	600	0.015
	12	24000	500	0.02	18000	370	0.01
1.5	6	22000	1200	0.08	16000	900	0.06
	8	22000	1100	0.07	16000	800	0.05
	10	22000	1000	0.06	16000	750	0.04
	12	20000	800	0.05	15000	600	0.03
	16	18000	500	0.03	13000	350	0.02
2	6	16000	1000	0.15	12000	750	0.15
	8	16000	1000	0.15	12000	750	0.1
	10	16000	800	0.1	12000	600	0.08
	12	16000	800	0.08	12000	600	0.06
	16	15000	600	0.06	11000	450	0.05
	20	14000	500	0.05	10000	350	0.04
3	12	11000	800	0.2	8200	600	0.15
	16	11000	600	0.15	8200	450	0.15
	20	11000	500	0.1	8200	350	0.1

Depth of cut



D: Dia.

1) When using a reduced speed, the revolution and feed rate must be reduced proportionately.

For Your Safety

●Don't handle inserts and chips without gloves. ●Please machine within the recommended application range and exchange expired tools with new ones in advance of breakage. ●Please use safety covers and wear safety glasses. ●When using compounded cutting oils, please take fire precautions. ●When using rotating tools, please make a trial run to check run-out, vibration and abnormal sounds etc.

MITSUBISHI MATERIALS CORPORATION



MITSUBISHI MATERIALS CORPORATION Area Marketing & Operations Dept.

KFC bldg., 8F, 1-6-1, Yokoami, Sumida-ku, Tokyo 130-0015, Japan
TEL +81-3-5819-8772 FAX +81-3-5819-8774

MMC HARTMETALL GmbH

Comeniusstr.2, 40670, Meerbusch GERMANY
TEL +49-2159-9189-0 FAX +49-2159-918966

MITSUBISHI MATERIALS U.S.A. CORPORATION Headquarters

17401, Eastman Street, Irvine, California, 92614, USA
TEL +1-949-862-5100 FAX +1-949-862-5180

MMC METAL SINGAPORE PTE LTD.

10, Arumugam Road, #04-00 Lion Industrial Bldg., 409957, SINGAPORE
TEL +65-6743-9370 FAX +65-6749-1469

Mitsubishi Carbide Home page : <http://www.mitsubishicarbide.com>

(Tools specifications subject to change without notice.)